

CERTIFICATE

 **ICCSET 2022**



NO.287/ICCSET/FT/UMK/XI/2022

This to certify that

ISMINARTI

who has attended the conference as

Author

International Conference on Computer Science and Engineering Technology 2022

"The Role of Industry 5.0, Innovation and Infrastructure for SDGs."

Faculty of Engineering - Universitas Muria Kudus, 26 November 2022



Dean of Faculty of Engineering
Universitas Muria Kudus



Mohammad Dailan, S.T., M.T.

Chief Committee of ICCSET 2022



Tri Listyorni, S.Kom., M.Kom

The International Conference on Computer Science and Engineering Technology

Theme :

*"The Role of Industry 5.0,
Innovation and Infrastructure
for SDGs."*

Book of Abstract

TABLE OF CONTENTS

ROOM 1	1
Improvement of hardness and micro structure of cu-zn as a propeller	2
Bentonite filter as an absorber of acid gas contaminant in the use of portable fumehoods	3
Laboratory studies on compressive strength of normal concrete using coral	4
Concrete compressive strength with sea sand as fine aggregate	5
Concrete compressive strength using aggregates from kawaliwu quarry	6
Concrete brackish water and fresh water in compressive strength comparison	7
Change in the indeks of retained strength in the ac-wc mixture	8
The effect of addition of camphor to pertalite on the efficiency of four stroke motorcycles	9
Improving The Cooling Performance Of Vehicle Radiator With SiO ₂ Nanofluid	10
Image analysis assisted by imagej to measure the area of monitor lizard skin	11
Effect of polymer type and specimen surface roughness on fatigue life	12
Current development of waste glass as construction materials	13
The significant impact of the covid-19 pandemic on the Indonesian	14
ROOM 2	15
Export marketing performance based on argo value co-creation	16
Augmented reality as a medium for the introduction of athletic equipments	17
Mobile location based service application for android based agricultural	18
Design of iot-based crab larvae farming system.....	19
Telegram chatbot prototype with convolutional neural network algorithm	20
Image segmentation using haar wavelet transform and artificial network f	21
Internet of things based on bridge slope detection	22
Design and analysis of monitoring system analysis using biofloc of engineering	23
Performance analysis of the haar classification method in performing	24
Dynamic panel regression with gmm estimation for analysis.....	25
Selection Enterprise Architecture Framework For Muhammadiyah.....	26
K-means algorithm for cluster analysis on muhammad qasim official youtube channel	27
Design of digital assessment web development for students as prospective	28
ROOM 3	29
Comparison performance of scintillation detectors for optimization	30
pH and water level control system to maintain the growth of chili plants in aquaponics	31
Google drive as a construction project cost monitoring	32
Experimental study of temperature control in vehicle cabin.....	33
Smart hats for avoiding roadblocks for the visually impaired with sound output.....	34
Optimization of location determination of distributed generation using hybrid	35
Modelling and simulation of biogas backup system on a PV/wind hybrid	36
Risk mitigation of drug supply chain during pandemic in pharmaceutical.....	37
Camera-based intelligent parking system using object detection	38

Proposed quality improvement of clutch disc products using statistical	39
Electrolytic tinning line maintenance design using fuzzy risk based maintenance method	40
Purification of stevia rebaudiana extract solution by adsorption using synthetic zeolite	41
Lecturer facial recognition system to automatically open the room and attendance.....	42
Charcoal briquettes for interfacial solar desalination	43
ROOM 4	44
Traffic density simulation and animation in yogyakarta giwangan traditional market	45
Lean ergonomic approach to minimize waste on inspection.....	46
Evaluation of operator performance in the service industry to improve company	47
Pre design of liquid radioactive waste treatment unit by adsorption with zeolite adsorbent	48
Study user experience in designing an automatic answer assessment	49
Analysis of infrastructure conditions on indonesia's national vital objects in tarakan city	50
Application of polyvinylidene fluoride (pvdf) membrane in improving	51
Gamma irradiation effect on phytochemical components, antioxidant activation	52
Effect of gamma radiation to serratia marcescens bacteria on rice	53
Preparing indonesia society 5.0: the new digital civil society	54
Effect of blades number to performance of savonius drag-type water turbine.....	55
Design and build a coolant waste processing tool used by production machines	56
Wet turning performance on hardened steel based on surface finish	57
Influence of friction stir welding parameters on metallurgical of aa6061-t651.....	58
ROOM 5	59
Development of an experimental module based on a radiation detection system	60
Application of learning vector quantization algorithm for pattern recognition	62
Application of rotating biological contactor (rbc) technology with kasongan.....	63
The introduction of shadow puppet figures using augmented reality	65
Critical path method in contractor service company management information	66
Smart mashup da'wah: transforming da'wah in the age of society 5.0	67
Evaluation of weight initializers for deep learning	68
Implementation wear notch sensor for martial arts motion capture monitoring.....	69
Aerial imagery segmentation of natural disaster-affected areas.....	70
Management information system guidance and counseling services	71
Social networks in forming sentiment analysis climate change cases	72
Educational data mining (edm) as an effort to determine the characteristics.....	73
ROOM 6	74
The development of business intelligence dashboard to measure the kpi.....	75
Internet of thing system irrigation acclimatization design using fuzzy logic	76
Attendance information system using fingerprint based on the internet of things	77
Detection of corn plant diseases based on image classification using cnn: a review	78
Security Performance of Advanced Encryption Standard 128	79
Defining key features and dimension of smart-dry model: bibliometric	80

Analysis of factors affecting user satisfaction with employee self-service applications.....	81
Automatic watering system based on iot-based plant soil moisture on lime plants	82
Understanding user acceptance of digital payment system: extending	83
Determinant of e-health adoption based on extended tpb: case in indonesia	84
Ct-scan brain tumor prediction with content based image retrieval method.....	85
Challenges, trends and future directions of financial technology in indonesia	86

Security Performance of Advanced Encryption Standard 128 for Long-Range Communication System

Isminarti^{1, 3, a), e)}, Syafaruddin^{1, b)}, Amil Ahmad Ilham^{2, c)}, Ardiaty Arief^{1, d)}

¹Department of Electrical Engineering, Universitas Hasanuddin

Jl. Poros Malino Km.6 Bontomarannu, 92127 Gowa South Sulawesi, Indonesia

²Department of Informatics, Universitas Hasanuddin

Jl. Poros Malino Km.6 Bontomarannu, 92127 Gowa South Sulawesi, Indonesia

³Department of Mechatronic Engineering, Politeknik Bosowa

Jl. Kapasa Raya No. 23 daya, 90241 Makassar, Indonesia

^{a)} Corresponding author: isminarti20d@student.unhas.ac.id

^{b)} syafaruddin@unhas.ac.id, ^{c)} amil@unhas.ac.id, ^{d)} ardiaty@eng.unhas.ac.id, ^{e)}

isminarti@politeknikbosowa.ac.id

Abstract.

Despite having outstanding security characteristics, the Advanced Encryption Standard (AES) algorithm has lately become vulnerable due to the rise of cryptanalysts. Improving this algorithm's security is crucial due to the widespread commercial use of AES. This research creates a security system on a Long-Range (LoRa) communication system utilizing the AES 128 algorithm to achieve faster processing times in the encryption and decryption process of messages using MATLAB to enhance security performance. The AES-128 block encryption in this inquiry demonstrates that the messages were transmitted in layers with an average processing time of 0.74 milliseconds (ms) for each function. The duration for encryption and decryption is 5.89 ms.

Keyword : Security, Communication, Algorithm, Long-Range

PAPER NAME

**AIPCP_Article_isminarti_syafaruddin_Am
ilAhmadIlham_ArdiatyArif (turnitin)**

WORD COUNT

1863 Words

CHARACTER COUNT

10445 Characters

PAGE COUNT

5 Pages

FILE SIZE

233.6KB

SUBMISSION DATE

Nov 13, 2022 2:07 AM GMT+8

REPORT DATE

Nov 13, 2022 2:08 AM GMT+8

● **3% Overall Similarity**

The combined total of all matches, including overlapping sources, for each database.

- 3% Internet database
- 3% Publications database
- Crossref database
- Crossref Posted Content database
- 0% Submitted Works database

● **Excluded from Similarity Report**

- Bibliographic material
- Quoted material
- Cited material
- Small Matches (Less than 25 words)

Security Performance of Advanced Encryption Standard 128 for Long-Range Communication System

Isminarti^{1, 3, a), e)}, Syafaruddin^{1, b)}, Amil Ahmad Ilham^{2, c)}, Ardiaty Arief^{1, d)}

¹*Department of Electrical Engineering, Universitas Hasanuddin
Jl. Poros Malino Km.6 Bontomarannu, 92127 Gowa South Sulawesi, Indonesia*

²*Department of Informatics, Universitas Hasanuddin
Jl. Poros Malino Km.6 Bontomarannu, 92127 Gowa South Sulawesi, Indonesia*

³*Department of Mechatronic Engineering, Politeknik Bosowa
Jl. Kapasa Raya No. 23 daya, 90241 Makassar, Indonesia*

^{a)} *Corresponding author: isminarti20d@student.unhas.ac.id*

^{b)} *syafaruddin@unhas.ac.id*, ^{c)} *amil@unhas.ac.id*, ^{d)} *ardiaty@eng.unhas.ac.id*, ^{e)} *isminarti@politeknikbosowa.ac.id*

Abstract. Despite having outstanding security characteristics, the Advanced Encryption Standard (AES) algorithm has lately become vulnerable due to the rise of cryptanalysts. Improving this algorithm's security is crucial due to the widespread commercial use of AES. This research creates a security system on a Long-Range (LoRa) communication system utilizing the AES 128 algorithm to achieve faster processing times in the encryption and decryption process of messages using MATLAB to enhance security performance. The AES-128 block encryption in this inquiry demonstrates that the messages were transmitted in layers with an average processing time of 0.74 milliseconds (ms) for each function. The duration for encryption and decryption is 5.89 ms.

INTRODUCTION

The rapid rise of cloud-based data applications has made it essential to protect data during transmission. Specific cryptographic techniques and procedures were devised to provide confidentiality, data protection, communication, authorization, and non-repudiation. Mathematical methods are used in cryptography to turn data into confidential information that only authorized people can access. Cryptography can be divided into two categories: symmetric and asymmetric. Two keys are used in asymmetric cryptography: a public key for encryption and a private key for decryption. These algorithms include SSL, RSA, SSH, and DH. This study will develop encryption and decryption models by integrating symmetric cryptography of the AES-128 block cipher type into the LoRa transceiver modulation and demodulation process on communication systems.

Symmetric cryptography encrypts and decrypts the message using the same key. AES, CAS, RC6, TEA, IDEA, Serpent, Twofish, and other algorithms are included in this category [1]–[4].

The AES algorithm uses 128-bit sequences for input and output (digits with values of 0 or 1). These sequences are occasionally referred to as blocks, and the length is the number of bits they hold. A 128-bit string serves as the AES algorithm's Cipher Key. This standard's scope prohibits using other input, output, and Cipher Key lengths. Such sequences will have bits numbered from zero to one less than the length of the line (block length or key length). The number i attached to a bit is known as its index and will be in one of the ranges $0 < i < 128$ [5]. For wireless networks, AES is used to secure communication [6] [7].

The National Institute of Standards and Technology (NIST) of the United States government has standardized the symmetric encryption known as Advanced Encryption Standard. AES features keys that are 128 bits, 192 bits, and 256 bits long. The number of rounds in the encryption process depends on these key lengths: AES 128-bit, 192-bit, and 256-bit have 10, 12, and 14 rounds, respectively [8]. The AES algorithm requires two inputs, like other kinds of

encryption: plaintext and cipher key. To create ciphertext, a succession of AES encryption algorithms is applied to the plaintext using a cipher key. Using the AES-128 method, this research's contribution is to provide the fastest processing times possible for text files. This will increase data security during the encryption and decryption process.

The outline of the paper is organized as follows. The next section explains the related work about AES 128 security systems, including the encryption and decryption processes. The following section presents the result and discussion, and the last section is a conclusion of the best processing time of the works.

RELATED WORK

Other studies concentrate on creating and examining the CBC (Cipher Block Chaining) mode implementation of the Mix Columns AES-128 algorithm. Parallelism in signal processing results in less virtual memory, logical components, and encryption time in the mix columns portion [9].

A researcher enhances the reliability of data security in IoT LoRaWAN-based applications that use unreliable network servers. Tests were run on a prototype IoT LoRaWAN system to compare outcomes with and without the security measure. The proposed payload format reduces the risks associated with using an unreliable network server by adding additional data security and integrity layers. When data includes 96 bytes, resulting in a payload format of 104, the overhead is at its highest and equals 31.2 seconds in duration [10].

Another researcher improved the security strength of the AES algorithm by showing the reasons for the loopholes in AES and provided a solution using a Symmetric Random Function Generator (SRFG). The use of randomness in the key generation process in block cipher is novel in this domain. They also compared their results with the original AES based on parameters such as nonlinearity, resiliency, balancedness, propagation characteristics, and immunity. The results suggest that, compared to the original AES, RK-AES has three times greater confusion qualities and a 53.7% better avalanche impact. The time required by the modified key expansion module, which forces a trade-off between security and time, is the constraint of their current work [11].

Encryption Process

The widely used technology of encryption greatly aids data security. The AES algorithm encrypts data using a specific structure to offer the highest level of security. It uses several rounds to accomplish that, with four subprocesses in each round. To encrypt a 128-bit block, there are four steps in each cycle [12][5]. **FIGURE 1** presents the encryption stage consisting of three stages: SubstitutionBytes, ShiftRows, MixColumns, and AddRoundKey.

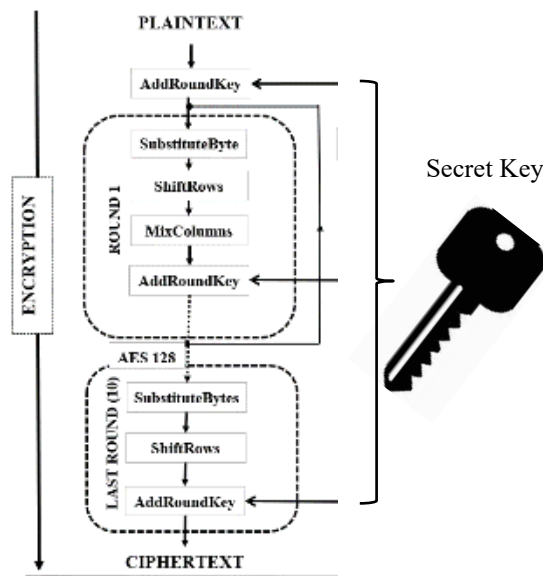


FIGURE 1. Encryption process in AES 128 security systems structure

The encryption process starts from plaintext/ message and then AddRoundKey (addresses the Round Key with an additional pointer). After this function, The SubBytes transformation uses a substitution table to perform a non-linear byte separately on each substitution box (S-box) byte. In the ShiftRows, the final three-line conditions' bytes in this function are cyclically shifted through the different numbers of bytes. The next function is processed column by column via the MixColumns transformation, which treats each column as a four-term polynomial.

Decryption Process

Decryption is the procedure used to recover the encrypted data's original form. The key that was obtained from the data sender is the foundation of this procedure. The sender and the receiver need the same key to encrypt and decrypt data with an AES algorithm, and the decryption procedure is similar to the encryption process in reverse order. As shown in **FIGURE 2**, the final round of the decryption stage consists of three steps: InverseShiftRow, InverseSubByte, and AddRoundKey.

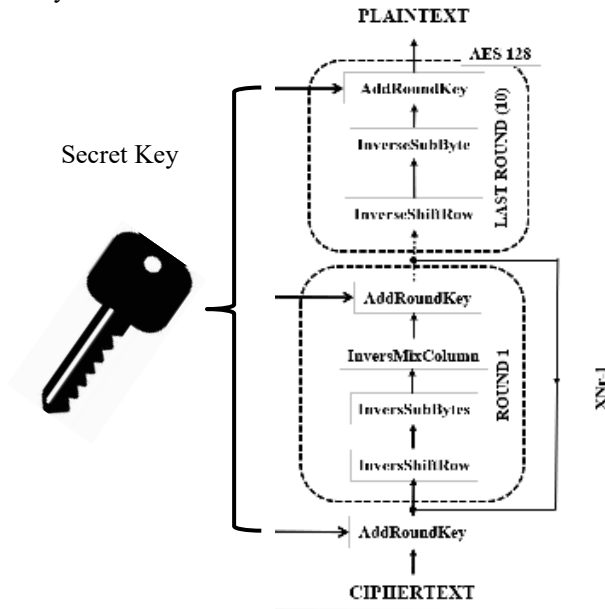


FIGURE 2. Decryption process in AES 128 security systems structure

Block ciphers offer security services using the Advanced Encryption Standard (AES) as a common algorithm. There are several variations of this technology available for network security. Strengthening the security of this algorithm is essential, given the use of AES in commercial applications. The AES structure's decryption operation is shown in **FIGURE 2**.

RESULT AND DISCUSSION

The author describes AES 128 methods using 10 round keys in this study. **FIGURE 1** illustrates the AES algorithm's operation. The key in this cryptography process is "60000102030400e1f10f," while the plaintext utilized is the hexadecimal code "00112233445566778899aabbccddeeff." Ciphertext "8ea2b7ca516745bfeafc49904b496089" is the result of the encryption operation. **TABLE 1** shows the results of this investigation.

TABLE 1. Processing Time of AES 128.

Function		Processing Time (ms)	Step (times)
Encryption	Decryption		
SubstituteByte	InverseSubByte	0.55	30
ShiftRow	InverseShiftRow	0.21	10

Function		Processing Time (ms)	Step (times)
Encryption	Decryption		
MixColumn	InversMixColumn	1.7	9
AddRoundKey	AddRoundKey	0.48	11
Average		0.74	

The plaintext is encoded to the same Hex code as the decryption output, which is as follows: "00112233445566778899aabbccddeeff."

This study used a logical XOR process to generate the Substitute Byte function for AES 128/128 bit/16 bytes. The results of this study show that an AES algorithm can create a faster processing time with a significant step, with an average processing time of 0.74 ms for each function. The duration for encryption and decryption is 5.89 ms.

CONCLUSION

The Rijndael Mix Column model is one technique that can be built to enhance the performance of communication systems in terms of security and time, according to the AES algorithm. Time simulations of each operation function in the encryption and decryption process are carried out in this study using MATLAB. This research's contribution is to provide the fastest processing times possible for text files. This will increase data security during the encryption and decryption process. This study used a logical XOR process to generate the Substitute Byte function for AES 128. The results of this study show that an AES algorithm can create a faster processing time with a large step, with an average processing time of 0.74 ms for each function. The duration for encryption and decryption is 5.89 ms. In future work, we will optimize the authentication process on the transceiver.

ACKNOWLEDGMENTS

This research is a part of the doctoral dissertation and granted with the research scheme of Penelitian Disertasi Doktor (PDD) 2022, sponsored by the Ministry of Education, Culture, Research, and Technology of the Republic of Indonesia.

REFERENCES

1. N. A. Wahid, A. Ali, B. Esparham, and M. Marwan, "A Comparison of Cryptographic Algorithms: DES, 3DES, AES, RSA, and Blowfish for Guessing Attacks Prevention," *J. Comput. Sci. Appl. Inf. Technol.*, vol. 3, no. 2, pp. 1–7, 2018.
2. S. Mewada, "Classification of Efficient Symmetric Key Cryptography Algorithms," *Int. J. Comput. Sci. Inf. Secure.*, vol. 14, no. 2, pp. 105–110, 2016.
3. S. Ramakrishnan, *Cryptographic and Information Security*. books.google.com, 2018.
4. D. Ganguly, *Cryptography and Network Security*, Fourth. 2012.
5. National Institute of Standards and Technology, *197: Announcing the advanced encryption standard (AES)*, vol. 2009. 2001.
6. P. T. Savolainen *et al.*, "Structured Overview of Communication Standards for Smart Grids," pp. 1–72, 2015.
7. J. Daemen and V. Rijmen, *The Design of Rijndael*, vol. 1, no. 69. Printed in Germany: © Springer-Verlag Berlin Heidelberg 2002, 2002.
8. N. Hayati, K. Ramli, M. Suryanegara, and Y. Suryanto, "Potential Development of AES 128-bit Key Generation for LoRaWAN Security," *2019 2nd Int. Conf. Commun. Eng. Technol. ICCET 2019*, pp. 57–61, 2019.
9. A. Barrera, C. W. Cheng, and S. Kumar, "Improved Mix Column Computation of Cryptographic AES," *Proc. - 2019 2nd Int. Conf. Data Intell. Secure. ICDIS 2019*, pp. 229–232, 2019.
10. P. De Moraes and A. F. Da Conceicao, "Protecting LoRaWAN data against untrusted network servers," in *Proceedings - IEEE Congress on Cybermatics: 2021 IEEE International Conferences on Internet of Things, iThings 2021, IEEE Green Computing and Communications, GreenCom 2021, IEEE Cyber, Physical and Social Computing, CPSCOM 2021 and IEEE Smart Data, SmartD*, 2021, pp. 99–106.
11. R. Saha, G. Geetha, G. Kumar, and T. H. Kim, "RK-AES: An Improved Version of AES Using a New Key Generation Process with Random Keys," *Secure. Commun. Networks*, vol. 2018, p. 9802475, 2018.

12. A. Muhammad Abdullah and A. Muhamad Abdullah, "Advanced Encryption Standard (AES) Algorithm to Encrypt and Decrypt Data," Eastern Mediterranean University, 2017.

● 3% Overall Similarity

Top sources found in the following databases:

- 3% Internet database
- 3% Publications database
- Crossref database
- Crossref Posted Content database
- 0% Submitted Works database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1

researchgate.net

Internet

3%

SURAT TUGAS

Nomor: 141/ST-LIPKPBSW/XI-2022

Yang bertandatangan di bawah ini :

N a m a : RISKA VERONIKA, S.ST., M.Par.

NIK : 2014005066

Jabatan : Ketua LIPK Politeknik-Bosowa

Dengan ini memberikan tugas kepada Sdr/i :

No.	NAMA	NIDN / NIM	PROGRAM STUDI
1.	ISMINARTI, S.T., M.T.	0930017903	DOSEN TEKNIK MEKATRONIKA

Untuk mengikuti kegiatan presentasi karya ilmiah dengan judul karya " **Security Performance of Advanced Encryption Standard 128 for Long-Range Communication System** " pada The International Conference on Computer Science and Engineering Technology yang diselenggarakan secara online oleh Fakultas Teknik Universitas Muria Kudus tanggal 26 november 2022.

Demikian surat tugas ini dibuat untuk dapat dipergunakan sebagaimana mestinya.

Makassar, 16 November 2022



RISKA VERONIKA, S.ST., M.Par.
Ketua LIPK Politeknik Bosowa